



VAPE & THC DETECTION

AIR QUALITY & ENVIRONMENTAL MONITORING

CHEMICAL DETECTION

PRIVACY AREA SECURITY

KEY WORD ALERTING GUNSHOT DETECTION | AGGRESSION & LOUD DISTURBANCES

The award-winning HALO Smart Sensor is expanding across industries as the preferred security solutions for privacy areas, where you can't place a camera or record conversations, with its new spoken key word, gunshot detection and Air Quality Index(AQI) features.

HALO detects environmental changes that occur in these privacy concern areas and as a device on the network, it sends email, text and security platform alerts to designated security personnel. HALO can detect flammables, hazardous chemicals, air quality changes such as vaping and smoking and changes in temperature and humidity. HALO can also detect noise level fluctuations and can send alerts when unusual activity occurs such as a gunshot or aggressive behavior like fighting.

With its key word detection, a daughter in her dorm room, a hotel housekeeper, a patient in duress, a student in a hazing incident or an elderly parent living by themselves can alert security to an attack or emergency in real time.

HALO will also analyze room occupancy through light detection in addition to monitoring temperature, humidity, pressure and air quality. HALO includes a built-in tamper detection alert.

HALO's Air Quality Index(AQI) will alert when air quality levels fall in the danger zone for spreading disease, reducing the spread of virus particulates and regularly monitoring to align with industry and government standards.



- . Spoken Key Word Alerting
- . Gunshot Detection

Audio Analytics

- · Excessive Banging

- Air Quality

 - Smoke

 - Air Quality Index (AQI)
 - · Volatile Organic Compounds (VOCs)

Chemical

Environmental

- Light Sensitivity


Alerting


- . Email or SMS text alerts
- Alerts to Video Management & Access Control
- 3rd party emergency applications
- Cloud mapping alerts







Operating Temperature 32°F - 122°F (0°C - 50°C)
Operating Humidity 0 to 90% Relative Humidity (non-condensing)
Power Supply PoE (1EEE 802.3af Class 3 Compliance) 9W
Dimensions 5.75° x 3.08° (146mm x 78mm)
Weight 0.8 bs (0.365 kgs)
Mounting Options Ceiling Flush Mount, Surface Mount (optional)
Vandal IK10 rated, vandal proof housing with Tamper Alert
Certifications UL, CUL, CE, RoHS, FCC, WEEE, California IoT Security 1798-91.04

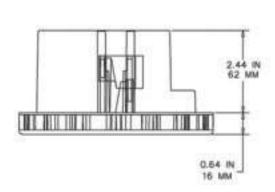





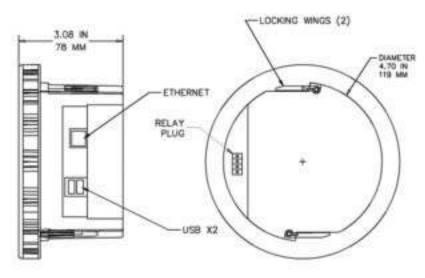



HALO IOT Smart Sensor contains a Class 1 Laser Product.

Live Display Resolution*	1024 x 768	Proposition of the Control of the Co
Frame Rate*	1 FPS	*Image display of
Video Compression*	MJPEG	sensor readings only.
Audio	MEMS Microphones (2) [Audio Analysis Only] No Recording of Live Stream	
Relays Outputs	2, Normally Open or Closed, 48VDC at 1 amp	
VMS Integrations	Milestone, Genetec, Aviglion, ExacQ Vision, Vivotek, Pelco, Ganz Cortrul, Nx Witness, Qognify, DW Spectrum IPVMS, Mirasys, Videolnsight, EoCortex, Wisenet Wave VMS, Assonsoft, Digifort	
Other 3rd Party Integrations	Rhombus Systems, Arcules, The Boring Lab, Presence Management, IDentifyED, Vigilance Software, Punch Alert, DIR-S, Extreme Network Defender, Aruba HPE, Connect One, Audio Enhancement, AMT, Gallagher, NuLEDs, C2P	
Status Light	Alarm Condition, Multi-Color, Programmable	
Speaker	Alarm Condition, Pre-Recorded Files, Programmable	

Network Specification

Ethemet RJ-45 (10/100 Base-T)

Alarm Triggers Vape, Vape THC, Aggression, Air Quality Index (AQI) Gunshot, Spoken Key Word, Tamper, Particulates, Carbon Dicoide Equivalents,

Total Volatile Organic Compounds, Carbon Monoxide, Ammonia, Temperature/Humidity, Light Level, Sound Levels

Protocols BACnet, RTSP, TCP/IP, UDP, IPV4/V6, HTTP, HTTPS, DHCP, ARP, Bonjour, Wireless Connectivity

Maximum Users Connections Live MJPEG Stream, 8 Users



